

(21) Application No: **0710856.6**
(22) Date of Filing: **01.06.2007**
(30) Priority Data:
(31) **0601210-8** (32) **01.06.2006** (33) **SE**

(71) Applicant(s):
BAE Systems Bofors AB
S-691 80 Karlskoga, Sweden
(72) Inventor(s):
Fredrick Olsson
Magnus Karlsson
(74) Agent and/or Address for Service:
Marks & Clerk LLP
90 Long Acre, LONDON, WC2E 9RA,
United Kingdom

(51) INT CL:
H01J 23/04 (2006.01) **H01J 23/05** (2006.01)
H01J 25/02 (2006.01) **H01J 25/32** (2006.01)

(56) Documents Cited:
WO 2006/037918 A2 **US 4751429 A**
US 4345220 A

(58) Field of Search:
INT CL **H01J, H01P, H03B**
Other: **EPODOC, WPI**

(54) Abstract Title: **High power microwave generator**

(57) The invention relates to a device for generation of microwaves comprising a coaxial virtual cathode oscillator (1) with an outer cylindrical tube forming a cathode (2) and connected to a transmission line (8) for feeding the cathode (2) with voltage pulses, and an inner cylindrical tube, at least partially transparent for electrons, forming an anode (3) and connected to a transmission device (8) for outputting microwave radiation generated by the formation of a virtual cathode (4) inside an area enclosed by the anode. Through the introduction of a centre conductor (5) arranged to coincide with the centre axle (19) for the cathode's (2) outer cylindrical tube and in electrical connection with the tube a device for generation of microwaves is obtained having improved energy efficiency and better broadband performance.

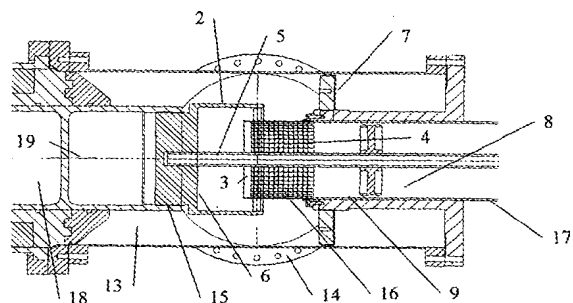


Fig. 4

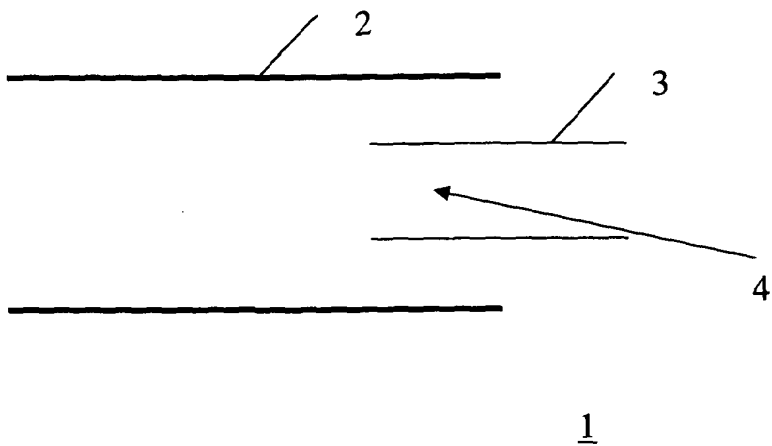


Fig. 1

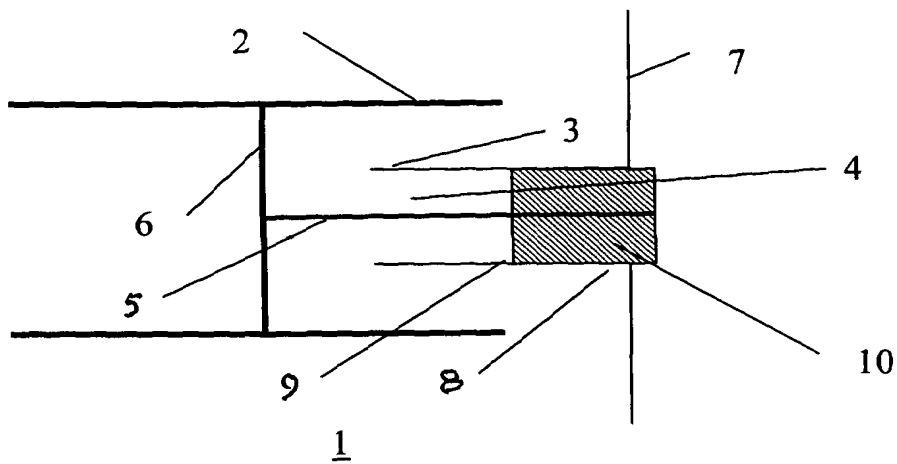


Fig. 2

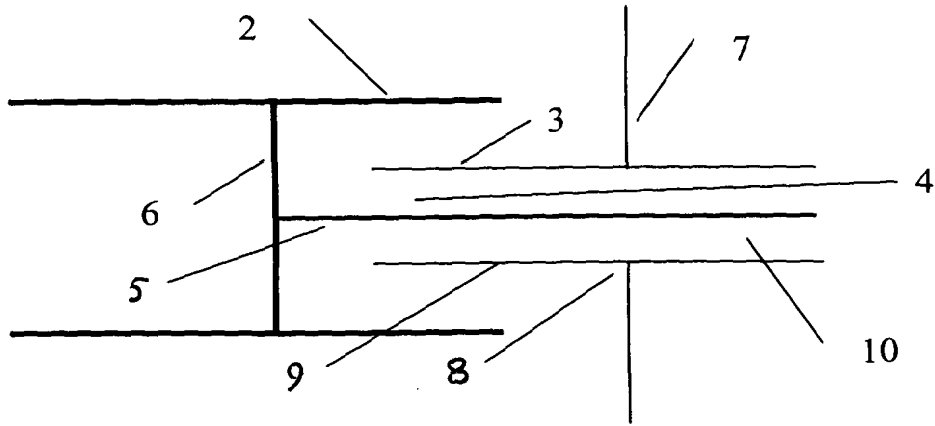


Fig. 3

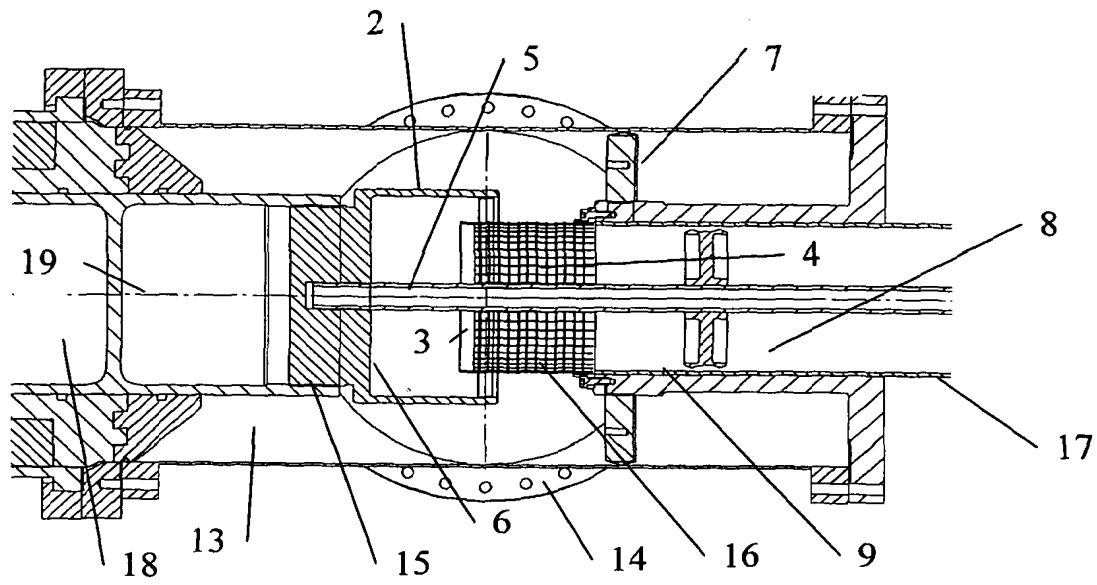


Fig. 4

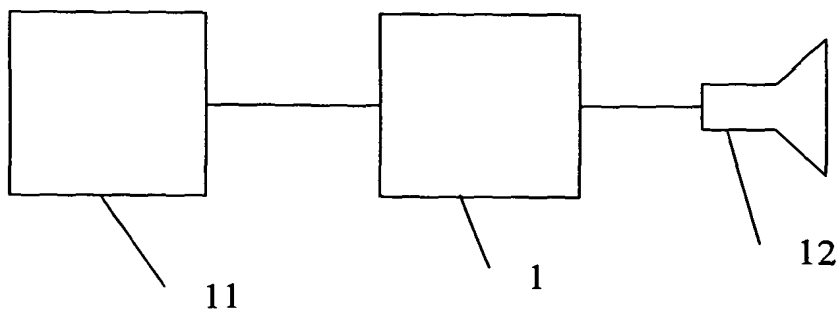


Fig. 5

Device for generation of microwaves

5 The present invention relates to a device for generation of microwaves comprising a coaxial virtual cathode oscillator (vircator) with a rotation symmetrical, outer, cylindrical tube around a central axis forming a cathode and connected to a transmission line for supplying the cathode with voltage pulses, and an inner cylindrical tube, at least partially transparent for electrons, forming an anode and
10 connected to a transmission device for outputting microwave radiation generated by the formation of a virtual cathode inside an area enclosed by the anode.

Microwave generators of this type can, among other uses, be used to knock out electronics using the high peak output that can briefly be generated.

15

A device as described in the first paragraph is essentially previously known from US 4 751 429 and the article "Numerical Simulation Studies of Coaxial Vircators", by Hao Shao, Guozhi Liu, Zhimin Song, Yajun Fan, Xiaoxin Song, Northwest Institute of Nuclear Technology, P 792-795.

20

Microwave sources with virtual cathode oscillators are generally narrow-band and have low degrees of efficiency. It is therefore desirable to be able to increase the device's degree of energy efficiency and bandwidth.

25 The purpose of the present invention is to obtain a device for generation of microwaves with improved degree of energy efficiency and better broadband performance.

The purpose of the invention is achieved through a device for generation of
30 microwaves in accordance with the first paragraph wherein the cathode comprises a cylindrical centre conductor arranged to coincide with the centre axle for the outer cylindrical tube and in electrically conductive connection with the outer cylindrical tube.

The generated electromagnetic radiation's frequency is primarily determined by the relation between the anode and cathode as well as drive voltage to the device. The bandwidth of the generated electromagnetic radiation is some few per cent, but there are in addition accentuated harmonics in the frequency spectrum that are generated at even multiples of the fundamental frequency. By introducing the cylindrical centre conductor in the centre of the outer cylindrical tube and electrically connecting the tube with the centre conductor, a broadband radiation source is created. The generated electromagnetic radiation contains partly a component generated by the virtual cathode as well as a component with lower frequency content generated by a transient process in the drive voltage source that feeds the device cathode with voltage pulses. The lower frequency component has a wider frequency band width than the higher frequency component.

The cylindrical centre conductor preferably has a circular cylindrical form. This form contributes to a symmetric design. One design proposal has a hollow centre conductor. Making the centre conductor hollow reduces both weight and consumption of materials without jeopardising device function.

According to one favourable embodiment of the device, the circular-cylindrical centre conductor is at least partially surrounded by a dielectric material connected with the anode's waveguide for outputting microwave radiation. The dielectric material can then be composed of plastic material. Alternatively, the dielectric material can be composed of ceramic material.

According to another favourable embodiment of the device the one end of the cylindrical centre conductor is electrically and mechanically connected to a central part of a first electrically conductive wall arranged on the inside of the cathode's cylindrical tube transverse to the longitudinal direction of the tube at a distance from the anode's, for the electron's at least partially transparent, tube. By introducing such a wall the virtual cathode can be strengthened through feedback.

According to an additional favourable embodiment of the device another electrically conductive wall is arranged on the outside of the anode's, for the electron's at least partially transparent, tube transverse to the longitudinal direction and at a distance

from the cathode cylindrical tube. Introduction of this wall and particularly together with a wall in accordance with the design in the previous paragraph strengthens the virtual cathode additionally through feedback.

- 5 The cylindrical centre conductor can substantially consist of metal, such as aluminium, copper, or steel.

A high voltage generator connected to the cathode's transmission line is suitable for feeding the device cathode. A suitable high voltage generator is a Marx generator.

- 10 Additionally, the wave guide for output of the microwave radiation is connected to an antenna. The antenna can be, for example, a horn antenna. In a proposed embodiment the device anode is composed, at least partially, of mesh. As an alternative, the anode can partially be composed of a thin foil.

- 15 The transmission device for outputting microwave radiation can be shaped in different ways. In accordance with a proposed embodiment, the transmission device for outputting microwave radiation to a load comprises at least parts of the inner cylindrical tube and a dielectric arranged in the inside of the tube. In accordance with another proposed design the transmission device for outputting microwave radiation to
20 a load comprises a waveguide arranged between the anode and the load. Both embodiments have been found to be favourable for outputting broadband microwave radiation.

- The present invention will be described in more detail below with reference to
25 appended drawings, in which:

Figure 1 schematically depicts an example of a known coaxial virtual cathode oscillator comprised in a device for generation of microwaves.

- 30 Figure 2 schematically depicts a first example of a coaxial virtual cathode oscillator in accordance with the present invention comprised in a device for generation of microwaves.

Figure 3 schematically depicts a second example of a coaxial virtual cathode oscillator in accordance with the present invention comprised in a device for generation of microwaves.

- 5 Figure 4 schematically depicts a more detailed example of a coaxial virtual cathode oscillator in accordance with the present invention comprised in a device for generation of microwaves.

- 10 Figure 5 schematically in block form depicts a complete device for generation of microwaves containing a coaxial virtual cathode oscillator in accordance with the present invention.

- 15 The known coaxial virtual cathode oscillator 1 schematically depicted in Figure 1 contains a cathode 2 in the form an outer cylindrical tube and an anode 3 in the form of an inner cylindrical tube. The cathode oscillator is a very simple geometric design and is based on a so-called virtual cathode 4 occurring inside of the anode under certain conditions.

- 20 Figure 2 depicts on the schematic level a modification of the known coaxial virtual cathode oscillator, vircator, for improving efficiency and bandwidth. In accordance with this embodiment a centre conductor 5 is arranged to coincide with the centre axle (not depicted) for the cathode 2 in the form of an outer cylindrical tube. The centre conductor 5 is electrically connected with the cathode 2 and in the embodiment depicted in Figure 2 via an electrically conductive structure 6 arranged on the inside of the anode's cylindrical tube and transverse to the tube's longitudinal direction. The structure's 6 electrically conductive wall creates feedback that can contribute to strengthening the virtual cathode 4. An additional conductive structure 7 in the form of an electrically conductive wall is for the same reason, to create feedback, arranged on the outside of the tube shaped anode 3 or thereto connected transmission device 8.
- 25 The transmission device 8 is composed of a tube 9 with the end towards the cathode, partially transparent, forming the anode 3 and with the other end equipped with a dielectric material 10. The dielectric material can as a suggestion be composed of ceramic or plastic material. The centre conductor 5 connected to the cathode 2 of the device runs in the centre of the tube 9. The transmission device transmits the
- 30

generated electromagnetic energy to the connected (not depicted) load in the form of, for example, an antenna structure.

Alternatively, the transmission device 8 can be designed with a waveguide between the anode 3 and the load present that leads the generated electromagnetic energy. Figure 3 depicts a schematic embodiment. In it a transmission line is formed by the tube 9 and the centre conductor 5. The dielectric in the tube 9 is in this case constituted by a vacuum.

- 10 The coaxial virtual cathode oscillator 1 can be included in a device for generation of microwaves depicted in Figure 5 and comprising a high voltage generator 11 connected to the cathode oscillator input and an antenna 12 connected to the cathode oscillator output. The antenna can be a horn antenna.
- 15 The cathode oscillator with peripherals is depicted and described in more detail in reference to Figure 4, both regarding design and function. Reference designations that correspond to previously described figures have been given the same reference designations in Figure 4. As depicted in Figure 4, the anode 3 and the cathode 2 are arranged in a vacuum chamber 13 with a connection 14 for a vacuum pump (not depicted in the figure). A screw joint 15 enables the adjustment of the structure's 6 distance to the anode 3 through rotation. A corresponding screw joint can be arranged for adjustment of the structure's 7 distance to the cathode 2. The anode 3 is equipped with a mesh 16 that is partially transparent to free, electrically charged particles. Alternatively, the anode can be composed of thin foil. The anode 3 passes to an outgoing waveguide 17, while the cathode 2 is fed by a transmission line 18. In accordance with the depicted embodiment, a hollow centre conductor 5 is arranged to coincide with the centre axle 19 for the cathode's 2 cylindrical tube. The centre conductor 5 extends at least from the structure 6 through the anode 3 to a transmission device 8.
- 25
- 30 The cathode oscillator's design is based on so-called virtual cathode that occurs under certain conditions. When a voltage pulse with negative potential is fed, for example by a Marx generator, via the transmission line 18 to the cathode 2, a high electric field occurs between the cathode 2 and the anode 3. This causes electrons to be field

emitted from the cathode material. The electrons accelerate after that toward the anode structure and the majority of the electrons will even pass the anode and begin to decelerate. If certain conditions are met, a virtual cathode 4 will occur inside the anode structure. Because the process is strongly non-linear, the phenomenon that causes the microwave radiation to be generated occurs. The more detailed conditions for microwave generation are not described here because they are part of the competence for expert in the field. Under the correct conditions, very high output is generated for a short period with a typical magnitude of 50-100 ns prior to shortcircuiting. Generated microwaves are radiated from the cathode oscillator anode via the waveguide 17 connected to the anode that have essentially the same radius as the anode 3.

Through introduction of the centre conductor 5 a radiation source is achieved with a broader bandwidth. To improve generation of electromagnetic energy with broad frequency content, the centre conductor's 5 radius is adapted to drive voltage and the distance between the anode and the cathode. Adaptation can be performed through computation or testing, or both.

The present invention is not limited to the design examples described above, but can be subject to modification within the framework of the subsequent patent claims.

Patent claims

1. Device for generation of microwaves comprising a coaxial virtual cathode oscillator with a rotation symmetrical, outer, cylindrical tube around a central axis
5 forming a cathode and connected to a transmission line for supplying the cathode with voltage pulses, and an inner cylindrical tube, at least partially transparent for electrons, forming an anode and connected to a transmission device for outputting microwave radiation generated by the formation of a virtual cathode inside an area enclosed by the anode, **wherein** the cathode comprises a cylindrical centre conductor
10 arranged to coincide with the centre axle for the outer cylindrical tube and in electrically conductive connection with the outer cylindrical tube.
2. Device as claimed in Patent Claim 1, **wherein** the cylindrical centre conductor has a circular-cylindrical form.
15
3. Device as claimed in Patent Claims 1 - 2, **wherein** the circular-cylindrical centre conductor is at least partially surrounded by a dielectric material disposed in the anode's waveguide for outputting microwave radiation.
- 20 4. Device as claimed in Patent Claim 3, **wherein** the dielectric material is composed of a plastic material.
5. Device as claimed in Patent Claim 3, **wherein** the dielectric material is composed of a ceramic material.
25
7. Device as claimed in any of the previous Patent Claims, **wherein** the one end of the cylindrical centre conductor is electrically and mechanically connected to a central part of a first electrically conductive wall arranged on the inside of the cathode's cylindrical tube transverse to the longitudinal direction of the tube at a
30 distance from the anode's, for the electron's at least partially transparent, tube.
8. Device as claimed in any of the previous Patent Claims, **wherein** another electrically conductive wall is arranged on the outside of the anode's, for the

electron's at least partially transparent, tube transverse to the longitudinal direction and at a distance from the cathode cylindrical tube.

9. Device as claimed in any of the previous Patent Claims, **wherein** the
5 cylindrical centre conductor essentially consists of metal, such as aluminium, copper, or steel.

10. Device as claimed in any of the previous Patent Claims, **wherein** the
transmission line for feeding the cathode is connected to a high voltage generator.
10

11. Device as claimed in Patent Claim 10, **wherein** the high voltage generator is a
Marx generator.

12. Device as claimed in any of the previous Patent Claims, **wherein** the
15 transmission device for outputting microwave radiation is connected to an antenna.

13. Device as claimed in Patent Claim 10, **wherein** the antenna is a horn antenna.

14. Device as claimed in any of the previous Patent Claims, **wherein** the anode is
20 composed, at least partially, of mesh.

15. Device as claimed in any of the previous Patent Claims, **wherein** the anode is
composed, at least partially, of a thin foil.

25 16. Device as claimed in any of the previous Patent Claims, **wherein** the
transmission device for outputting microwave radiation to a load comprises at least
parts of the inner cylindrical tube as well as a dielectric arranged in the inside of the
tube.

30 17. Device as claimed in any of the previous Patent Claims, **wherein** the
transmission device for outputting microwave radiation to a load comprises a
waveguide arranged between the anode and the load.

18. Device as claimed in any of the previous Patent Claims, **wherein** the centre conductor is hollow.

19. Device for generation of microwaves as claimed in Claim 1 substantially as
5 herein described with reference to the accompanying drawings.

10

Application No: GB0710856.6

Examiner: Ian Rees

Claims searched: 1 to 19

Date of search: 26 September 2007

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular reference
A	-	US 4751429 A MINICH. See figure 1 and associated description in columns 3 to 5.
A	-	WO 2006/037918 A2 COMMISSARIAT A L'ENERGIE ATOMIQUE. See abstract.
A	-	US 4345220 A SULLIVAN. See figure and column 2 (lines 16 to 55).

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC

Worldwide search of patent documents classified in the following areas of the IPC

H01J; H01P; H03B

The following online and other databases have been used in the preparation of this search report

EPODOC, WPI

PUB-NO: GB002462874A
DOCUMENT-IDENTIFIER: GB 2462874 A
TITLE: High power microwave generator
PUBN-DATE: March 3, 2010

INVENTOR-INFORMATION:

NAME	COUNTRY
OLSSON, FREDRICK	SE
KARLSSON, MAGNUS	SE

ASSIGNEE-INFORMATION:

NAME	COUNTRY
BAE SYSTEMS BOFORS AB	SE

APPL-NO: GB00710856

APPL-DATE: June 1, 2007

PRIORITY-DATA: SE00601210A (June 1, 2006)

INT-CL (IPC): H01J023/04

EUR-CL (EPC): H01J023/04 , H01J023/05 , H01J025/02 ,
H01J025/32

ABSTRACT:

CHG DATE=20100303 STATUS=N>The invention relates to a device for generation of microwaves comprising a coaxial virtual cathode oscillator (1) with an outer cylindrical tube forming a cathode

(2) and connected to a transmission line (8) for feeding the cathode (2) with voltage pulses, and an inner cylindrical tube, at least partially transparent for electrons, forming an anode (3) and connected to a transmission device (8) for outputting microwave radiation generated by the formation of a virtual cathode (4) inside an area enclosed by the anode. Through the introduction of a centre conductor (5) arranged to coincide with the centre axle (19) for the cathode's (2) outer cylindrical tube and in electrical connection with the tube a device for generation of microwaves is obtained having improved energy efficiency and better broadband performance.